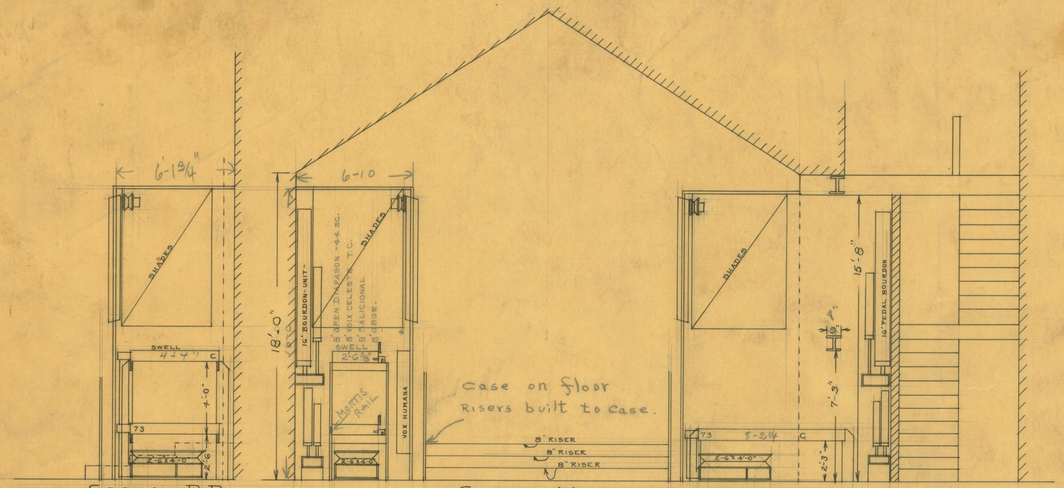

NOTE

CASE DIMENSIONS ARE INSIDE ONLY

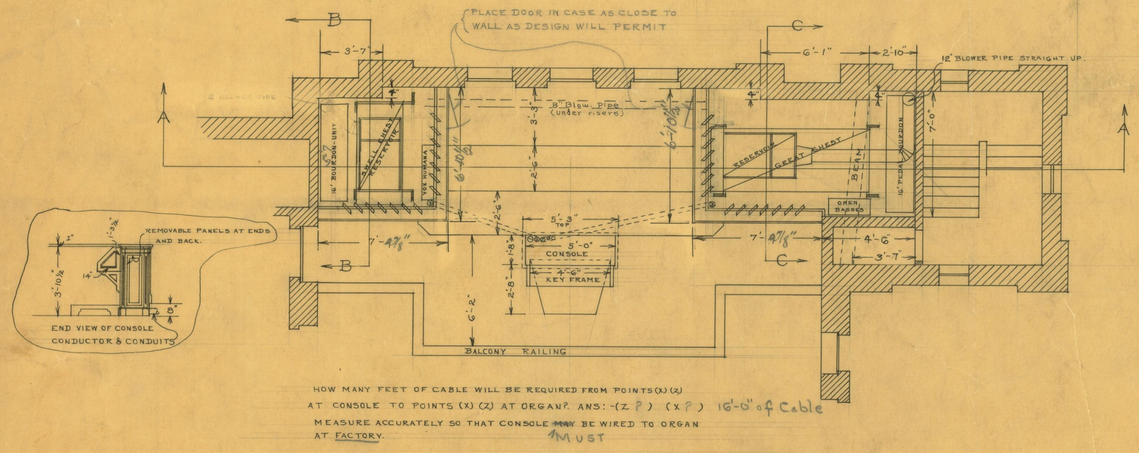

HOW MANY FEET OF CABLE WILL BE REQUIRED FROM POINTS (X) (Z) AT CONSOLE TO POINTS (X) (Z) AT ORGAN? ANS:-(Z ?) (X ?) 16'-0" of Cable

MEASURE ACCURATELY SO THAT CONSOLE ~~MAY~~ MUST BE WIRED TO ORGAN AT FACTORY.

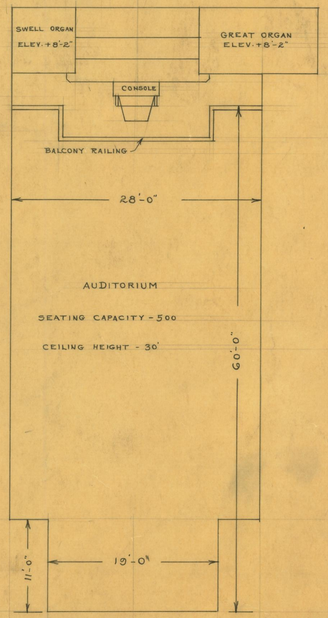

ONE 8" DIAMETER GALVANIZED WIND CONDUCTOR FROM BLOWER TO EACH ORGAN

ONE 3" " " " " " " (OR NEAREST PIPE) TO CONSOLE.

ONE 2½ " CONDUIT FROM CONSOLE TO EACH ORGAN FOR CABLES.

ONE 1" " " " " " MOTOR FOR STARTER WIRES.

ONE 1" " " " " " GENERATOR FOR WIRES.

PULL BOXES SHOULD BE PLACED AT EACH BEND OF LARGE CONDUITS.

IF CONDUITS ARE NOT REQUIRED BY BUILDING CODES PROVIDE EQUIVALENT SPACE.

SIZE OF BLOWER
7'-0" LONG
2'-11" WIDE
3'-10" HIGH
12" OUTLET

ACTION	ELECTRIC
CONSOLE	DETACHED 16'-0"
CASING	PLAIN WHITE OAK
PIPES	NATURAL ZINC
MANUALS	TWO
WIND PRESSURE	5"

BLOWER PIPE, CONDUITS, ELECTRICAL WIRING FOR MOTOR, AND GENERATOR, AND FROM CONSOLE TO MOTOR, BY CHURCH.

DOORS THRU WHICH BLOWER PARTS PASS ARE 2'-6" x 7'

DIMENSIONS O.K. BY D.S. WENTZ 10-20-30

HOPE EVANGELICAL LUTHERAN CHURCH
ST. LOUIS, MO.

5862

SCALE - ¼" = 1'-0"

CHAMBERS - 8-9-30.
ORGAN - - - - 9-24-30.

M. P. MÖLLER PIPE ORGAN MFR.,
HAGERSTOWN, MD.